



# CIRCUIT TRACKS

# Programmer's Reference Guide

# Contents

|                                                   |    |
|---------------------------------------------------|----|
| Circuit Tracks MIDI Parameters .....              | 3  |
| Synths 1 & 2 .....                                | 3  |
| Macro Knobs .....                                 | 6  |
| Filter Table.....                                 | 10 |
| Distortion Table .....                            | 10 |
| Mod Matrix Table .....                            | 10 |
| Osc Waveform Table .....                          | 10 |
| Audio Table .....                                 | 10 |
| LFO Waveform Table.....                           | 11 |
| Patch and Project Select .....                    | 11 |
| Supported Realtime Messages.....                  | 11 |
| Supported System Common Messages .....            | 11 |
| Drum Control.....                                 | 12 |
| Drum Notes Table .....                            | 12 |
| Project Control .....                             | 13 |
| Synth Patch Sysex Message Formats.....            | 14 |
| Replace Current Patch .....                       | 14 |
| Replace Patch .....                               | 14 |
| Patch Dump Request .....                          | 15 |
| Format of a Synth Patch (Single) SysEx File ..... | 15 |
| Format of a Synth Patch (Bank) Sysex File .....   | 15 |
| Synth Patch Format .....                          | 16 |

# Circuit Tracks MIDI Parameters

## Synths 1 & 2

Send messages on MIDI Channel 1 for Synth 1 and Channel 2 for Synth.

| Section    | Parameter                | CC / NRPN | Control No. | Range              | Default Value | Notes                                                                   |
|------------|--------------------------|-----------|-------------|--------------------|---------------|-------------------------------------------------------------------------|
| Voice      |                          |           |             |                    |               |                                                                         |
|            | Polyphony Mode           | CC        | 3           | 0 – 2              | 2             | 0=Mono, 1=Mono AG, 2=Poly                                               |
|            | Portamento Rate          | CC        | 5           | 0 – 127            | 0             |                                                                         |
|            | Pre-Glide                | CC        | 9           | 52 – 76 (-12 – 12) | 64 (0)        |                                                                         |
|            | Keyboard Octave          | CC        | 13          | 58 – 69 (-6 – 5)   | 64 (0)        | 60=-4 Octaves, 64=0 Octaves, 68=+4 Octaves                              |
| Oscillator |                          |           |             |                    |               |                                                                         |
|            | osc 1 wave               | CC        | 19          | 0 – 29             | 2             | See Osc Waveform Table                                                  |
|            | osc 1 wave interpolate   | CC        | 20          | 0 – 127            | 0             |                                                                         |
|            | osc 1 pulse width index  | CC        | 21          | 0 – 127 (-64 – 63) | 127 (63)      |                                                                         |
|            | osc 1 virtual sync depth | CC        | 22          | 0 – 127            | 0             |                                                                         |
|            | osc 1 density            | CC        | 24          | 0 – 127            | 0             |                                                                         |
|            | osc 1 density detune     | CC        | 25          | 0 – 127            | 0             |                                                                         |
|            | osc 1 semitones          | CC        | 26          | 0 – 127 (-64 – 63) | 64 (0)        |                                                                         |
|            | osc 1 cents              | CC        | 27          | 0 – 127 (-64 – 63) | 64 (0)        |                                                                         |
|            | osc 1 pitchbend          | CC        | 28          | 52 – 76 (-12 – 12) | 76 (12)       |                                                                         |
|            | osc 2 wave               | CC        | 29          | 0 – 29             | 2             | See Osc Waveform Table                                                  |
|            | osc 2 wave interpolate   | CC        | 30          | 0 – 127            | 0             |                                                                         |
|            | osc 2 pulse width index  | CC        | 31          | 0 – 127 (-64 – 63) | 127 (63)      |                                                                         |
|            | osc 2 virtual sync depth | CC        | 33          | 0 – 127            | 0             |                                                                         |
|            | osc 2 density            | CC        | 35          | 0 – 127            | 0             |                                                                         |
|            | osc 2 density detune     | CC        | 36          | 0 – 127            | 0             |                                                                         |
|            | osc 2 semitones          | CC        | 37          | 0 – 127 (-64 – 63) | 64 (0)        |                                                                         |
|            | osc 2 cents              | CC        | 39          | 0 – 127 (-64 – 63) | 64 (0)        |                                                                         |
|            | osc 2 pitchbend          | CC        | 40          | 52 – 76 (-12 – 12) | 76 (12)       |                                                                         |
| Mixer      |                          |           |             |                    |               |                                                                         |
|            | osc 1 level              | CC        | 51          | 0 – 127            | 127           |                                                                         |
|            | osc 2 level              | CC        | 52          | 0 – 127            | 0             |                                                                         |
|            | ring mod level           | CC        | 54          | 0 – 127            | 0             |                                                                         |
|            | noise level              | CC        | 56          | 0 – 127            | 0             |                                                                         |
|            | pre FX level             | CC        | 58          | 52 – 82 (-12 – 18) | 64 (0)        | -12 to +18 dB                                                           |
|            | post FX level            | CC        | 59          | 52 – 82 (-12 – 18) | 64 (0)        | -12 to +18 dB                                                           |
| Filter     |                          |           |             |                    |               |                                                                         |
|            | routing                  | CC        | 60          | 0 – 2              | 0             | 0=Normal<br>1=Osc 1 bypasses the filter<br>2=Osc 1 + Osc 2 bypasses the |
|            | drive                    | CC        | 63          | 0 – 127            | 0             | filter                                                                  |
|            | drive type               | CC        | 65          | 0 – 6              | 0             | See Filter Table                                                        |
|            | type                     | CC        | 68          | 0 – 5              | 1             |                                                                         |
|            | frequency                | CC        | 74          | 0 – 127            | 127           |                                                                         |
|            | tracking                 | CC        | 69          | 0 – 127            | 127           |                                                                         |
|            | resonance                | CC        | 71          | 0 – 127            | 0             |                                                                         |
|            | Q normalize              | CC        | 78          | 0 – 127            | 64            |                                                                         |
|            | env 2 to frequency       | CC        | 79          | 0 – 127 (-64 – 63) | 64 (0)        |                                                                         |

| Envelope       |                          |      |       |                    |          |                                              |
|----------------|--------------------------|------|-------|--------------------|----------|----------------------------------------------|
|                | env 1 velocity           | CC   | 108   | 0 – 127 (-64 – 63) | 64 (0)   |                                              |
|                | env 1 attack             | CC   | 73    | 0 – 127            | 2        |                                              |
|                | env 1 decay              | CC   | 75    | 0 – 127            | 90       |                                              |
|                | env 1 sustain            | CC   | 70    | 0 – 127            | 127      |                                              |
|                | env 1 release            | CC   | 72    | 0 – 127            | 40       |                                              |
|                | env 2 velocity           | NRPN | 0:0   | 0 – 127 (-64 – 63) | 64 (0)   |                                              |
|                | env 2 attack             | NRPN | 0:1   | 0 – 127            | 2        |                                              |
|                | env 2 decay              | NRPN | 0:2   | 0 – 127            | 75       |                                              |
|                | env 2 sustain            | NRPN | 0:3   | 0 – 127            | 35       |                                              |
|                | env 2 release            | NRPN | 0:4   | 0 – 127            | 45       |                                              |
|                | env 3 delay              | NRPN | 0:14  | 0 – 127            | 0        |                                              |
|                | env 3 attack             | NRPN | 0:15  | 0 – 127            | 10       |                                              |
|                | env 3 decay              | NRPN | 0:16  | 0 – 127            | 70       |                                              |
|                | env 3 sustain            | NRPN | 0:17  | 0 – 127            | 64       |                                              |
|                | env 3 release            | NRPN | 0:18  | 0 – 127            | 40       |                                              |
| LFO            |                          |      |       |                    |          |                                              |
|                | lfo 1 waveform           | NRPN | 0:70  | 0 – 37             | 0        | See LFO waveform table                       |
|                | lfo 1 phase offset       | NRPN | 0:71  | 0 – 119            | 0        | (0° - 357°) in steps of 3°                   |
|                | lfo 1 slew rate          | NRPN | 0:72  | 0 – 127            | 0        |                                              |
|                | lfo 1 delay              | NRPN | 0:74  | 0 – 127            | 0        |                                              |
|                | lfo 1 delay sync         | NRPN | 0:75  | 0 – 35             | 0        |                                              |
|                | lfo 1 rate               | NRPN | 0:76  | 0 – 127            | 68       |                                              |
|                | lfo 1 rate sync          | NRPN | 0:77  | 0 – 35             | 0        |                                              |
|                | lfo 1 one shot           | NRPN | 0:122 | 12 – 13            | 12 (OFF) | 12=OFF, 13=ON                                |
|                | lfo 1 key sync           | NRPN | 0:122 | 14 – 15            | 14 (OFF) | 14=OFF, 15=ON                                |
|                | Lfo 1 common sync        | NRPN | 0:122 | 16 – 17            | 16 (OFF) | 16=OFF, 17=ON                                |
|                | Lfo 1 delay trigger      | NRPN | 0:122 | 18 – 19            | 18 (OFF) | 18=OFF, 19=ON                                |
|                | Lfo 1 fade mode          | NRPN | 0:123 | 0 – 3              | 0        | 0=Fade In, 1=Fade Out, 2=Gate In, 3=Gate Out |
|                | Lfo 2 waveform           | NRPN | 0:79  | 0 – 37             | 0        | See LFO Waveform Table                       |
|                | Lfo 2 phase offset       | NRPN | 0:80  | 0 – 119            | 0        | (0° - 357°) in steps of 3°                   |
|                | Lfo 2 slew rate          | NRPN | 0:81  | 0 – 127            | 0        |                                              |
|                | Lfo 2 delay              | NRPN | 0:83  | 0 – 127            | 0        |                                              |
|                | Lfo 2 delay sync         | NRPN | 0:84  | 0 – 35             | 0        |                                              |
|                | Lfo 2 rate               | NRPN | 0:85  | 0 – 127            | 68       |                                              |
|                | Lfo 2 rate sync          | NRPN | 0:86  | 0 – 35             | 0        |                                              |
|                | lfo 2 one shot           | NRPN | 0:122 | 22– 23             | 22 (OFF) | 22=OFF, 23=ON                                |
|                | lfo 2 key sync           | NRPN | 0:122 | 24– 25             | 24 (OFF) | 24=OFF, 25=ON                                |
|                | lfo 2 common sync        | NRPN | 0:122 | 26– 27             | 26 (OFF) | 26=OFF, 27=ON                                |
|                | lfo 2 delay trigger      | NRPN | 0:122 | 28– 29             | 28 (OFF) | 28=OFF, 29=ON                                |
|                | lfo 2 fade mode          | NRPN | 0:123 | 4– 7               | 4        | 4=Fade In, 5=Fade Out, 6=Gate In, 7=Gate Out |
| Effects and EQ |                          |      |       |                    |          |                                              |
|                | distortion level         | CC   | 91    | 0– 127             | 0        |                                              |
|                | chorus level             | CC   | 93    | 0–127              | 0        |                                              |
|                | EQ bass frequency        | NRPN | 0:104 | 0– 127             | 64       |                                              |
|                | EQ bass level            | NRPN | 0:105 | 0– 127 (-64 – 63)  | 64 (0)   |                                              |
|                | EQ mid frequency         | NRPN | 0:106 | 0– 127             | 64       |                                              |
|                | EQ mid level             | NRPN | 0:107 | 0– 127 (-64 – 63)  | 64 (0)   |                                              |
|                | EQ treble frequency      | NRPN | 0:108 | 0– 127             | 125      |                                              |
|                | EQ treble level          | NRPN | 0:109 | 0– 127 (-64 – 63)  | 64 (0)   |                                              |
|                | distortion type          | NRPN | 1:0   | 0– 6               | 0        | See Distortion Table                         |
|                | distortion compensation  | NRPN | 1:1   | 0– 127             | 100      |                                              |
|                | chorus type              | NRPN | 1:24  | 0– 1               | 1        | 0=Phaser, 1=Chorus                           |
|                | chorus rate              | NRPN | 1:25  | 0– 127             | 84 (20)  |                                              |
|                | chorus rate sync         | NRPN | 1:26  | 0– 35              | 0        |                                              |
|                | chorus feedback          | NRPN | 1:27  | 0– 127 (-64 – 63)  | 74 (10)  |                                              |
|                | chorus mod depth         | NRPN | 1:28  | 0– 127             | 64       |                                              |
|                | chorus delay             | NRPN | 1:29  | 0– 127             | 64       |                                              |
| Mod Matrix     |                          |      |       |                    |          |                                              |
|                | Mod matrix 1 source 1    | NRPN | 1:83  | 0 – 12             | 0        | See Mod Matrix Table                         |
|                | Mod matrix 1 source 2    | NRPN | 1:84  | 0 – 12             | 0        | See Mod Matrix Table                         |
|                | mod matrix 1 depth       | NRPN | 1:86  | 0 – 127 (-64 – 63) | 64 (0)   |                                              |
|                | mod matrix 1 destination | NRPN | 1:87  | 0 – 17             | 0        | See Mod Matrix Table                         |
|                | mod matrix 2 source 1    | NRPN | 1:88  | 0– 12              | 0        | See Mod Matrix Table                         |
|                | mod matrix 2 source 2    | NRPN | 1:89  | 0 – 12             | 0        | See Mod Matrix Table                         |
|                | mod matrix 2 depth       | NRPN | 1:91  | 0 – 127 (-64 – 63) | 64 (0)   |                                              |
|                | mod matrix 2 destination | NRPN | 1:92  | 0 – 17             | 0        | See Mod Matrix Table                         |
|                | mod matrix 3 source 1    | NRPN | 1:93  | 0 – 12             | 0        | See Mod Matrix Table                         |

|  |                           |      |       |                    |        |                      |
|--|---------------------------|------|-------|--------------------|--------|----------------------|
|  | mod matrix 3 source 2     | NRPN | 1:94  | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 3 depth        | NRPN | 1:96  | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 3 destination  | NRPN | 1:97  | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 4 source 1     | NRPN | 1:98  | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 4 source 2     | NRPN | 1:99  | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 4 depth        | NRPN | 1:101 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 4 destination  | NRPN | 1:102 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 5 source 1     | NRPN | 1:103 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 5 source 2     | NRPN | 1:104 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 5 depth        | NRPN | 1:106 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 5 destination  | NRPN | 1:107 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 6 source 1     | NRPN | 1:108 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 6 source 2     | NRPN | 1:109 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 6 depth        | NRPN | 1:111 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 6 destination  | NRPN | 1:112 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 7 source 1     | NRPN | 1:113 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 7 source 2     | NRPN | 1:114 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 7 depth        | NRPN | 1:116 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 7 destination  | NRPN | 1:117 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 8 source 1     | NRPN | 1:118 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 8 source 2     | NRPN | 1:119 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 8 depth        | NRPN | 1:121 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 8 destination  | NRPN | 1:122 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 9 source 1     | NRPN | 1:123 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 9 source 2     | NRPN | 1:124 | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 9 depth        | NRPN | 1:126 | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 9 destination  | NRPN | 1:127 | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 10 source 1    | NRPN | 2:0   | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 10 source 2    | NRPN | 2:1   | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 10 depth       | NRPN | 2:3   | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 10 destination | NRPN | 2:4   | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 11 source 1    | NRPN | 2:5   | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 11 source 2    | NRPN | 2:6   | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 11 depth       | NRPN | 2:8   | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 11 destination | NRPN | 2:9   | 0 – 17             | 0      | See Mod Matrix Table |
|  | mod matrix 12 source 1    | NRPN | 2:10  | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 12 Source 2    | NRPN | 2:11  | 0 – 12             | 0      | See Mod Matrix Table |
|  | mod matrix 12 depth       | NRPN | 2:12  | 0 – 127 (-64 – 63) | 64 (0) |                      |
|  | mod matrix 12 destination | NRPN | 2:13  | 0 – 17             | 0      | See Mod Matrix Table |

## Macro Knobs

| Section     | Parameter                     | CC/NRPN | Control No. | Range              | Default Value | Notes |
|-------------|-------------------------------|---------|-------------|--------------------|---------------|-------|
| Macro Knobs |                               |         |             |                    |               |       |
|             | macro knob 1 position         | CC      | 80          | 0 – 127            | 0             |       |
|             | macro knob 1 destination A    | NRPN    | 3:0         | 0 – 70             | 0             |       |
|             | macro knob 1 start position A | NRPN    | 3:1         | 0 – 127            | 0             |       |
|             | macro knob 1 end position A   | NRPN    | 3:2         | 0 – 127            | 127           |       |
|             | macro knob 1 depth A          | NRPN    | 3:3         | 0 – 127 (-64 – 63) | 64 (0)        |       |
|             | macro knob 1 destination B    | NRPN    | 3:4         | 0 – 70             | 0             |       |
|             | macro knob 1 start position B | NRPN    | 3:5         | 0 – 127            | 0             |       |
|             | macro knob 1 end position B   | NRPN    | 3:6         | 0 – 127            | 127           |       |
|             | macro knob 1 depth B          | NRPN    | 3:7         | 0 – 127 (-64 – 63) | 64 (0)        |       |
|             | macro knob 1 destination C    | NRPN    | 3:8         | 0 – 70             | 0             |       |
|             | macro knob 1 start position C | NRPN    | 3:9         | 0 – 127            | 0             |       |
|             | macro knob 1 end position C   | NRPN    | 3:10        | 0 – 127            | 127           |       |
|             | macro knob 1 depth C          | NRPN    | 3:11        | 0 – 127 (-64 – 63) | 64 (0)        |       |
|             | macro knob 1 destination D    | NRPN    | 3:12        | 0 – 70             | 0             |       |
|             | macro knob 1 start position D | NRPN    | 3:13        | 0 – 127            | 0             |       |
|             | macro knob 1 end position D   | NRPN    | 3:14        | 0 – 127            | 127           |       |
|             | macro knob 1 depth D          | NRPN    | 3:15        | 0 – 127 (-64 – 63) | 64 (0)        |       |
|             | macro knob 2 position         | CC      | 81          | 0 – 127            | 0             |       |

|  |                               |      |      |                    |        |  |
|--|-------------------------------|------|------|--------------------|--------|--|
|  | macro knob 2 destination A    | NRPN | 3:16 | 0 – 70             | 0      |  |
|  | macro knob 2 start position A | NRPN | 3:17 | 0 – 127            | 0      |  |
|  | macro knob 2 end position A   | NRPN | 3:18 | 0 – 127            | 127    |  |
|  | macro knob 2 depth A          | NRPN | 3:19 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 2 destination B    | NRPN | 3:20 | 0 – 70             | 0      |  |
|  | macro knob 2 start position B | NRPN | 3:21 | 0 – 127            | 0      |  |
|  | macro knob 2 end position B   | NRPN | 3:22 | 0 – 127            | 127    |  |
|  | macro knob 2 depth B          | NRPN | 3:23 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 2 destination C    | NRPN | 3:24 | 0 – 70             | 0      |  |
|  | macro knob 2 start position C | NRPN | 3:25 | 0 – 127            | 0      |  |
|  | macro knob 2 end position C   | NRPN | 3:26 | 0 – 127            | 127    |  |
|  | macro knob 2 depth C          | NRPN | 3:27 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 2 destination D    | NRPN | 3:28 | 0 – 70             | 0      |  |
|  | macro knob 2 start position D | NRPN | 3:29 | 0 – 127            | 0      |  |
|  | macro knob 2 end position D   | NRPN | 3:30 | 0 – 127            | 127    |  |
|  | macro knob 2 depth D          | NRPN | 3:31 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 3 position         | CC   | 82   | 0 – 127            | 0      |  |
|  | macro knob 3 destination A    | NRPN | 3:32 | 0 – 70             | 0      |  |
|  | macro knob 3 start position A | NRPN | 3:33 | 0 – 127            | 0      |  |
|  | macro knob 3 end position A   | NRPN | 3:34 | 0 – 127            | 127    |  |
|  | macro knob 3 depth A          | NRPN | 3:35 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 3 destination B    | NRPN | 3:36 | 0 – 70             | 0      |  |
|  | macro knob 3 start position B | NRPN | 3:37 | 0 – 127            | 0      |  |
|  | macro knob 3 end position B   | NRPN | 3:38 | 0 – 127            | 127    |  |
|  | macro knob 3 depth B          | NRPN | 3:39 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 3 destination C    | NRPN | 3:40 | 0 – 70             | 0      |  |
|  | macro knob 3 start position C | NRPN | 3:41 | 0 – 127            | 0      |  |
|  | macro knob 3 end position C   | NRPN | 3:42 | 0 – 127            | 127    |  |
|  | macro knob 3 depth C          | NRPN | 3:43 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 3 destination D    | NRPN | 3:44 | 0 – 70             | 0      |  |
|  | macro knob 3 start position D | NRPN | 3:45 | 0 – 127            | 0      |  |
|  | macro knob 3 end position D   | NRPN | 3:46 | 0 – 127            | 127    |  |
|  | macro knob 3 depth D          | NRPN | 3:47 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 4 position         | CC   | 83   | 0 – 127            | 0      |  |
|  | macro knob 4 destination A    | NRPN | 3:48 | 0 – 70             | 0      |  |
|  | macro knob 4 start position A | NRPN | 3:49 | 0 – 127            | 0      |  |
|  | macro knob 4 end position A   | NRPN | 3:50 | 0 – 127            | 127    |  |
|  | macro knob 4 depth A          | NRPN | 3:51 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 4 destination B    | NRPN | 3:52 | 0 – 70             | 0      |  |
|  | macro knob 4 start position B | NRPN | 3:53 | 0 – 127            | 0      |  |
|  | macro knob 4 end position B   | NRPN | 3:54 | 0 – 127            | 127    |  |
|  | macro knob 4 depth B          | NRPN | 3:55 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 4 destination C    | NRPN | 3:56 | 0 – 70             | 0      |  |
|  | macro knob 4 start position C | NRPN | 3:57 | 0 – 127            | 0      |  |
|  | macro knob 4 end position C   | NRPN | 3:58 | 0 – 127            | 127    |  |
|  | macro knob 4 depth C          | NRPN | 3:59 | 0 – 127 (-64 – 63) | 64 (0) |  |
|  | macro knob 4 destination D    | NRPN | 3:60 | 0 – 70             | 0      |  |
|  | macro knob 4 start position D | NRPN | 3:61 | 0 – 127            | 0      |  |
|  | macro knob 4 end position D   | NRPN | 3:62 | 0 – 127            | 127    |  |
|  | macro knob 4 depth D          | NRPN | 3:63 | 0 – 127 (-64 – 63) | 64 (0) |  |

|  |                               |      |       |                    |        |  |
|--|-------------------------------|------|-------|--------------------|--------|--|
|  | macro knob 5 position         | CC   | 84    | 0 – 127            | 0      |  |
|  | macro knob 5 destination A    | NRPN | 3:64  | 0 – 70             | 0      |  |
|  | macro knob 5 start position A | NRPN | 3:65  | 0 – 127            | 0      |  |
|  | macro knob 5 end position A   | NRPN | 3:66  | 0 – 127            | 127    |  |
|  | macro knob 5 depth A          | NRPN | 3:67  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 5 destination B    | NRPN | 3:68  | 0 – 70             | 0      |  |
|  | macro knob 5 start position B | NRPN | 3:69  | 0 – 127            | 0      |  |
|  | macro knob 5 end position B   | NRPN | 3:70  | 0 – 127            | 127    |  |
|  | macro knob 5 depth B          | NRPN | 3:71  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 5 destination C    | NRPN | 3:72  | 0 – 70             | 0      |  |
|  | macro knob 5 start position C | NRPN | 3:73  | 0 – 127            | 0      |  |
|  | macro knob 5 end position C   | NRPN | 3:74  | 0 – 127            | 127    |  |
|  | macro knob 5 depth C          | NRPN | 3:75  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 5 destination D    | NRPN | 3:76  | 0 – 70             | 0      |  |
|  | macro knob 5 start position D | NRPN | 3:77  | 0 – 127            | 0      |  |
|  | macro knob 5 end position D   | NRPN | 3:78  | 0 – 127            | 127    |  |
|  | macro knob 5 depth D          | NRPN | 3:79  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 6 position         | CC   | 85    | 0 – 127            | 0      |  |
|  | macro knob 6 destination A    | NRPN | 3:80  | 0 – 70             | 0      |  |
|  | macro knob 6 start position A | NRPN | 3:81  | 0 – 127            | 0      |  |
|  | macro knob 6 end position A   | NRPN | 3:82  | 0 – 127            | 127    |  |
|  | macro knob 6 depth A          | NRPN | 3:83  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 6 destination B    | NRPN | 3:84  | 0 – 70             | 0      |  |
|  | macro knob 6 start position B | NRPN | 3:85  | 0 – 127            | 0      |  |
|  | macro knob 6 end position B   | NRPN | 3:86  | 0 – 127            | 127    |  |
|  | macro knob 6 depth B          | NRPN | 3:87  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 6 destination C    | NRPN | 3:88  | 0 – 70             | 0      |  |
|  | macro knob 6 start position C | NRPN | 3:89  | 0 – 127            | 0      |  |
|  | macro knob 6 end position C   | NRPN | 3:90  | 0 – 127            | 127    |  |
|  | macro knob 6 depth C          | NRPN | 3:91  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 6 destination D    | NRPN | 3:92  | 0 – 70             | 0      |  |
|  | macro knob 6 start position D | NRPN | 3:93  | 0 – 127            | 0      |  |
|  | macro knob 6 end position D   | NRPN | 3:94  | 0 – 127            | 127    |  |
|  | macro knob 6 depth D          | NRPN | 3:95  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 7 position         | CC   | 86    | 0 – 127            | 0      |  |
|  | macro knob 7 destination A    | NRPN | 3:96  | 0 – 70             | 0      |  |
|  | macro knob 7 start position A | NRPN | 3:97  | 0 – 127            | 0      |  |
|  | macro knob 7 end position A   | NRPN | 3:98  | 0 – 127            | 127    |  |
|  | macro knob 7 depth A          | NRPN | 3:99  | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 7 destination B    | NRPN | 3:100 | 0 – 70             | 0      |  |
|  | macro knob 7 start position B | NRPN | 3:101 | 0 – 127            | 0      |  |
|  | macro knob 7 end position B   | NRPN | 3:102 | 0 – 127            | 127    |  |
|  | macro knob 7 depth B          | NRPN | 3:103 | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 7 destination C    | NRPN | 3:104 | 0 – 70             | 0      |  |
|  | macro knob 7 start position C | NRPN | 3:105 | 0 – 127            | 0      |  |
|  | macro knob 7 end position C   | NRPN | 3:106 | 0 – 127            | 127    |  |
|  | macro knob 7 depth C          | NRPN | 3:107 | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 7 destination D    | NRPN | 3:108 | 0 – 70             | 0      |  |
|  | macro knob 7 start position D | NRPN | 3:109 | 0 – 127            | 0      |  |
|  | macro knob 7 end position D   | NRPN | 3:110 | 0 – 127            | 127    |  |
|  | macro knob 7 depth D          | NRPN | 3:111 | 0 – 127 (–64 – 63) | 64 (0) |  |

|  |                               |      |       |                    |        |  |
|--|-------------------------------|------|-------|--------------------|--------|--|
|  | macro knob 8 position         | CC   | 87    | 0 – 127            | 0      |  |
|  | macro knob 8 destination A    | NRPN | 3:112 | 0 – 70             | 0      |  |
|  | macro knob 8 start position A | NRPN | 3:113 | 0 – 127            | 0      |  |
|  | macro knob 8 end position A   | NRPN | 3:114 | 0 – 127            | 127    |  |
|  | macro knob 8 depth A          | NRPN | 3:115 | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 8 destination B    | NRPN | 3:116 | 0 – 70             | 0      |  |
|  | macro knob 8 start position B | NRPN | 3:117 | 0 – 127            | 0      |  |
|  | macro knob 8 end position B   | NRPN | 3:118 | 0 – 127            | 127    |  |
|  | macro knob 8 depth B          | NRPN | 3:119 | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 8 destination C    | NRPN | 3:120 | 0 – 70             | 0      |  |
|  | macro knob 8 start position C | NRPN | 3:121 | 0 – 127            | 0      |  |
|  | macro knob 8 end position C   | NRPN | 3:122 | 0 – 127            | 127    |  |
|  | macro knob 8 depth C          | NRPN | 3:123 | 0 – 127 (–64 – 63) | 64 (0) |  |
|  | macro knob 8 destination D    | NRPN | 3:124 | 0 – 70             | 0      |  |
|  | macro knob 8 start position D | NRPN | 3:125 | 0 – 127            | 0      |  |
|  | macro knob 8 end position D   | NRPN | 3:126 | 0 – 127            | 127    |  |
|  | macro knob 8 depth D          | NRPN | 3:127 | 0 – 127 (–64 – 63) | 64 (0) |  |



## Filter Table

| Value      | Type               |
|------------|--------------------|
| Drive Type |                    |
| 0          | diode              |
| 1          | valve              |
| 2          | clipper            |
| 3          | cross-over         |
| 4          | rectifier          |
| 5          | bit reducer        |
| 6          | rate reducer       |
| Type       |                    |
| 0          | low pass 12dB      |
| 1          | low pass 24dB      |
| 2          | band pass 6/6 dB   |
| 3          | band pass 12/12 dB |
| 4          | high pass 12dB     |
| 5          | high pass 24dB     |

## Distortion Table

| Value | Type         |
|-------|--------------|
| 0     | diode        |
| 1     | valve        |
| 2     | clipper      |
| 3     | cross-over   |
| 4     | rectify      |
| 5     | bit reducer  |
| 6     | rate reducer |

## Mod Matrix Table

| Value       | Type                      |
|-------------|---------------------------|
| Source      |                           |
| 0           | direct                    |
|             |                           |
|             |                           |
|             |                           |
| 4           | velocity                  |
| 5           | keyboard                  |
| 6           | LFO 1 +                   |
| 7           | LFO 1 +/-                 |
| 8           | LFO 2 +                   |
| 9           | LFO 2 +/-                 |
| 10          | env amp                   |
| 11          | env filter                |
| 12          | env 3                     |
| Destination |                           |
| 0           | osc 1 & 2 pitch           |
| 1           | osc 1 pitch               |
| 2           | osc 2 pitch               |
| 3           | osc 1 v-sync              |
| 4           | osc 2 v-sync              |
| 5           | osc 1 pulse width / index |
| 6           | osc 2 pulse width / index |
| 7           | osc 1 level               |
| 8           | osc 2 level               |
| 9           | noise level               |
| 10          | ring modulation 1*2 level |
| 11          | filter drive amount       |
| 12          | filter frequency          |
| 13          | filter resonance          |
| 14          | LFO 1 rate                |
| 15          | LFO 2 rate                |
| 16          | amp envelope decay        |
| 17          | filter envelope decay     |

## Osc Waveform Table

| Value      | Type                |
|------------|---------------------|
| Waveforms  |                     |
| 0          | sine                |
| 1          | triangle            |
| 2          | sawtooth            |
| 3          | saw 9:1 PW          |
| 4          | saw 8:2 PW          |
| 5          | saw 7:3 PW          |
| 6          | saw 6:4 PW          |
| 7          | saw 5:5 PW          |
| 8          | saw 4:6 PW          |
| 9          | saw 3:7 PW          |
| 10         | saw 2:8 PW          |
| 11         | saw 1:9 PW          |
| 12         | pulse width         |
| 13         | square              |
| Wavetables |                     |
| 14         | sine table          |
| 15         | analogue pulse      |
| 16         | analogue sync       |
| 17         | triangle-saw blend  |
| 18         | digital nasty 1     |
| 19         | digital nasty 2     |
| 20         | digital saw-square  |
| 21         | digital vocal 1     |
| 22         | digital vocal 2     |
| 23         | digital vocal 3     |
| 24         | digital vocal 4     |
| 25         | digital vocal 5     |
| 26         | digital vocal 6     |
| 27         | random collection 1 |
| 28         | random collection 2 |
| 29         | random collection 3 |

## Audio Table

| Parameter            | CC/NRPN | Control No. | Range   | Default Value |
|----------------------|---------|-------------|---------|---------------|
| Audio 1 level        | CC      | 13          | 0 – 127 | 100           |
| Audio 2 level        | CC      | 15          | 0 – 127 | 100           |
| Audio 1 reverb level | CC      | 31          | 0 – 127 | 0             |
| Audio 2 reverb level | CC      | 32          | 0 – 127 | 0             |
| Audio 1 delay level  | CC      | 33          | 0 – 127 | 0             |
| Audio 2 delay level  | CC      | 34          | 0 – 127 | 0             |
| Audio 1 Pan          | CC      | 35          | 0 – 127 | 0             |
| Audio 2 Pan          | CC      | 36          | 0 – 127 | 0             |

## LFO Waveform Table

| Value | Type           |
|-------|----------------|
| 0     | sine           |
| 1     | triangle       |
| 2     | sawtooth       |
| 3     | square         |
| 4     | random S/H     |
| 5     | time S/H       |
| 6     | piano envelope |
| 7     | sequence 1     |
| 8     | sequence 2     |
| 9     | sequence 3     |
| 10    | sequence 4     |
| 11    | sequence 5     |
| 12    | sequence 6     |
| 13    | sequence 7     |
| 14    | alternative 1  |
| 15    | alternative 2  |
| 16    | alternative 3  |
| 17    | alternative 4  |
| 18    | alternative 5  |
| 19    | alternative 6  |
| 20    | alternative 7  |
| 21    | alternative 8  |
| 22    | chromatic      |
| 23    | chromatic 16   |
| 24    | major          |
| 25    | major 7        |
| 26    | minor 7        |
| 27    | min arp 1      |
| 28    | min arp 2      |
| 29    | diminished     |
| 30    | dec minor      |
| 31    | minor 3rd      |
| 32    | pedal          |
| 33    | 4ths           |
| 34    | 4ths x12       |
| 35    | 1625 maj       |
| 36    | 1625 Min       |
| 37    | 2511           |

## Patch and Project Select

| MIDI Channel | Parameter | Value    | Notes                    |
|--------------|-----------|----------|--------------------------|
| 1            | PGM*      | 0 – 63   | select synth 1 patch     |
| 2            | PGM       | 0 – 63   | select synth 2 patch     |
| 16           | PGM       | 0 – 63   | select project (instant) |
| 16           | PGM       | 64 – 127 | select project (queued)  |

\*PGM = Program Change

Note, for drum patch selection see Drum Control table

## Supported Realtime Messages

| Message      |
|--------------|
| start        |
| stop         |
| continue     |
| timing clock |

## Supported System Common Messages

| Message               |
|-----------------------|
| song position pointer |
| song select           |

## Drum Control

Messages on MIDI Channel 10

| Parameter           | CC / NRPN | Control No. | Range              | Default Value |
|---------------------|-----------|-------------|--------------------|---------------|
| drum 1 patch select | CC        | 8           | 0 – 63             | 0             |
| drum 1 level        | CC        | 12          | 0 – 127            | 0             |
| drum 1 pitch        | CC        | 14          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 1 decay        | CC        | 15          | 0 – 127            | 0             |
| drum 1 distortion   | CC        | 16          | 0 – 127            | 0             |
| drum 1 EQ           | CC        | 17          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 1 pan          | CC        | 77          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 2 patch select | CC        | 18          | 0 – 63             | 0             |
| drum 2 level        | CC        | 23          | 0 – 127            | 0             |
| drum 2 pitch        | CC        | 34          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 2 decay        | CC        | 40          | 0 – 127            | 0             |
| drum 2 distortion   | CC        | 42          | 0 – 127            | 0             |
| drum 2 EQ           | CC        | 43          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 2 pan          | CC        | 78          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 3 patch select | CC        | 44          | 0 – 63             | 0             |
| drum 3 level        | CC        | 45          | 0 – 127            | 0             |
| drum 3 pitch        | CC        | 46          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 3 decay        | CC        | 47          | 0 – 127            | 0             |
| drum 3 distortion   | CC        | 48          | 0 – 127            | 0             |
| drum 3 EQ           | CC        | 49          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 3 pan          | CC        | 79          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 4 patch select | CC        | 50          | 0 – 63             | 0             |
| drum 4 level        | CC        | 53          | 0 – 127            | 0             |
| drum 4 pitch        | CC        | 55          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 4 decay        | CC        | 57          | 0 – 127            | 0             |
| drum 4 distortion   | CC        | 61          | 0 – 127            | 0             |
| drum 4 EQ           | CC        | 76          | 0 – 127 (-64 – 63) | 64 (0)        |
| drum 4 pan          | CC        | 80          | 0 – 127 (-64 – 63) | 64 (0)        |

## Drum Notes Table

| MIDI Note | Drum Number |
|-----------|-------------|
| 60        | Drum 1      |
| 62        | Drum 2      |
| 64        | Drum 3      |
| 65        | Drum 4      |

# Project Control

Send messages on MIDI Channel 16.

| Section             | Parameter          | CC / NRPN | Control No. | Range              | Default Value | Notes                                                                                                 |
|---------------------|--------------------|-----------|-------------|--------------------|---------------|-------------------------------------------------------------------------------------------------------|
| Reverb              |                    |           |             |                    |               |                                                                                                       |
|                     | synth 1 send level | CC        | 88          | 0 – 127            | 0             |                                                                                                       |
|                     | synth 2 send level | CC        | 89          | 0 – 127            | 0             |                                                                                                       |
|                     | drum 1 send level  | CC        | 90          | 0 – 127            | 0             |                                                                                                       |
|                     | drum 2 send level  | CC        | 106         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 3 send level  | CC        | 109         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 4 send level  | CC        | 110         | 0 – 127            | 0             |                                                                                                       |
|                     | type               | NRPN      | 1:18        | 0 – 5              | 2             | 0=Chamber, 1=Small Room, 2=Large Room<br>3=Small Hall, 4=Large Hall, 5=Great Hall                     |
|                     | decay              | NRPN      | 1:19        | 0 – 127            | 64            |                                                                                                       |
|                     | damping            | NRPN      | 1:20        | 0 – 127            | 64            |                                                                                                       |
| Delay               |                    |           |             |                    |               |                                                                                                       |
|                     | synth 1 send level | CC        | 111         | 0 – 127            | 0             |                                                                                                       |
|                     | synth 2 send level | CC        | 112         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 1 send level  | CC        | 113         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 2 send level  | CC        | 114         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 3 send level  | CC        | 115         | 0 – 127            | 0             |                                                                                                       |
|                     | drum 4 send level  | CC        | 116         | 0 – 127            | 0             |                                                                                                       |
|                     | time               | NRPN      | 1:6         | 0 – 127            | 64            |                                                                                                       |
|                     | time sync          | NRPN      | 1:7         | 0 – 35             | 20            |                                                                                                       |
|                     | feedback           | NRPN      | 1:8         | 0 – 127            | 64            |                                                                                                       |
|                     | width              | NRPN      | 1:9         | 0 – 127            | 127           |                                                                                                       |
|                     | left-right ratio   | NRPN      | 1:10        | 0 – 12             | 4             | 0=1:1, 1=4:3, 2=3:4, 3=3:2, 4=2:3, 5=2:1, 6=1:2<br>7=3:1, 8=1:3, 9=4:1, 10=1:4, 11=1:OFF,<br>12=OFF:1 |
|                     | slew rate          | NRPN      | 1:11        | 0 – 127            | 5             |                                                                                                       |
| Master Filter       |                    |           |             |                    |               |                                                                                                       |
|                     | frequency          | CC        | 74          | 0 – 127 (-64 – 63) | 64 (0)        | 0-63=Low Pass, 64=OFF, 65-127=High Pass                                                               |
|                     | resonance          | CC        | 71          | 0 – 127            | 30            |                                                                                                       |
| Sidechain           |                    |           |             |                    |               |                                                                                                       |
|                     | synth 1 source     | NRPN      | 2:55        | 0 – 4              | 0             | 0=Drum 1, 1=Drum 2, 2=Drum 3, 3=Drum 4,<br>4=OFF                                                      |
|                     | synth 1 attack     | NRPN      | 2:56        | 0 – 127            | 0             |                                                                                                       |
|                     | synth 1 hold       | NRPN      | 2:57        | 0 – 127            | 50            |                                                                                                       |
|                     | synth 1 decay      | NRPN      | 2:58        | 0 – 127            | 70            |                                                                                                       |
|                     | synth 1 depth      | NRPN      | 2:59        | 0 – 127            | 0             |                                                                                                       |
|                     | synth 2 source     | NRPN      | 2:65        | 0 – 4              | 0             | 0=Drum 1, 1=Drum 2, 2=Drum 3, 3=Drum 4,<br>4=OFF                                                      |
|                     | synth 2 attack     | NRPN      | 2:66        | 0 – 127            | 0             |                                                                                                       |
|                     | synth 2 hold       | NRPN      | 2:67        | 0 – 127            | 50            |                                                                                                       |
|                     | synth 2 decay      | NRPN      | 2:68        | 0 – 127            | 70            |                                                                                                       |
|                     | synth 2 depth      | NRPN      | 1:69        | 0 – 127            | 0             |                                                                                                       |
| Mixer               |                    |           |             |                    |               |                                                                                                       |
|                     | synth 1 level      | CC        | 12          | 0 – 127            | 100           |                                                                                                       |
|                     | synth 2 level      | CC        | 14          | 0 – 127            | 100           |                                                                                                       |
|                     | synth 1 pan        | CC        | 117         | 0 – 127 (-64 – 63) | 64 (0)        |                                                                                                       |
|                     | synth 2 pan        | CC        | 118         | 0 – 127 (-64 – 63) | 64 (0)        |                                                                                                       |
| Additional Controls |                    |           |             |                    |               |                                                                                                       |
|                     | FX Bypass          | NRPN      | 1:21        | 0 – 1              | 0             | 0=Off (FX enabled), 1=On (FX disabled)                                                                |

# Synth Patch Sysex Message Formats

For best results, we recommend using Circuit Tracks's USB connection for SysEx communication, as it is faster and more reliable. Although Circuit Tracks will receive SysEx messages via MIDI DIN, any response will be sent via USB only.

## Replace Current Patch

This table describes the format of the "Replace current patch" message.

When this is received by Circuit Tracks it replaces the contents of the current sound (in RAM) for the specified Synth part.

There are states in which the device is not capable of receiving this message. For example, it may be busy processing another sysex message. In these situations the message will be ignored. The message may be sent without delays between the bytes. However, consecutive messages should have at least 20 ms between them to allow time for processing.

| Hex                | Dec     | Description                                            |
|--------------------|---------|--------------------------------------------------------|
| F0                 | 240     | SysEx message                                          |
| 00 20 29           | 0 32 41 | Manufacturer ID (Novation)                             |
| 01                 | 1       | Novation Product Type (Synth)                          |
| 64                 | 100     | Novation Product Number (Circuit Tracks)               |
| 00                 | 0       | Circuit Tracks Command:<br>00h - Replace Current Patch |
| 00 / 01            | 0 / 2   | Location:<br>00h - Synth 1<br>01h - Synth 2            |
| 00                 | 0       | Reserved for future use: set to 0                      |
| 00 - 7F            | 0 - 127 | Synth patch data: 340 bytes (see the Patch table)      |
| F7                 | 247     | End of Sysex (EOX)                                     |
| 350 bytes in total |         |                                                        |

## Replace Patch

This table describes the format of the "Replace Patch" message.

When this is received by Circuit Tracks it replaces the contents of the specified patch in Flash memory.

There are states in which the device is not capable of receiving this message. For example, it may be busy processing another sysex message. In these situations the message will be ignored. The message may be sent without delays between the bytes. However, consecutive messages should have at least 20 ms between them to allow time for processing.

| Hex                | Dec     | Description                                       |
|--------------------|---------|---------------------------------------------------|
| F0                 | 240     | SysEx message                                     |
| 00 20 29           | 0 32 41 | Manufacturer ID (Novation)                        |
| 01                 | 1       | Novation Product Type (Synth)                     |
| 64                 | 100     | Novation Product Number (Circuit Tracks)          |
| 01                 | 1       | Circuit Tracks Command:<br>01h - Replace Patch    |
| 00 - 3F            | 0 - 63  | Patch number to overwrite                         |
| 00                 | 0       | Reserved for future use: set to 0                 |
| 00 - 7F            | 0 - 127 | Synth patch data: 340 bytes (see the Patch table) |
| F7                 | 247     | End of SysEx (EOX)                                |
| 350 bytes in total |         |                                                   |

## Current Patch Dump Request

This table describes the format of the “Current Patch Dump Request” message. There are states in which the device is not capable of receiving this message. For example, it may be busy processing another sysex message. In these situations the message will be ignored. The message may be sent without delays between the bytes. However, consecutive messages should have at least 20 ms between them to allow time for processing.

When this message is received on either MIDI DIN or MIDI USB, Circuit Tracks will respond by sending a Replace Current Patch message to its USB port. The location in the response will match the location in the request, and the patch data will correspond accordingly.

| Hex              | Dec     | Description                                                 |
|------------------|---------|-------------------------------------------------------------|
| F0               | 240     | Sysex message                                               |
| 00 20 29         | 0 32 41 | Manufacturer ID (Novation)                                  |
| 01               | 1       | Novation Product Type (Synth)                               |
| 64               | 100     | Novation Product Number (Circuit Tracks)                    |
| 40               | 64      | Circuit Tracks Command:<br>40h - Current Patch Dump Request |
| 00 / 01          | 0 / 1   | Location:<br>00h - Synth 1<br>01h - Synth 2                 |
| F7               | 247     | End of SysEx (EOX)                                          |
| 9 bytes in total |         |                                                             |

## Patch Dump Request

To obtain a patch from Flash memory, follow these steps:

1. First send a Program Change message with the desired patch number (0 - 63) to a synth MIDI channel.
1. Wait enough time for the patch to load from Flash memory (10 ms should be plenty)
1. Send a Current Patch Dump Request message with the Location set to the corresponding Synth part.

Consecutive sequences should have at least 20 ms between them to allow time for processing.

## Format of a Synth Patch (Single) SysEx File


To create a single patch in a portable format that can be shared with others, use a sysex file containing a single “Replace Current Patch” sysex message with the Location set to Synth 1.

## Format of a Synth Patch (Bank) Sysex File

To create an entire bank of 64 synth patches, use a sysex file containing a concatenation of 64 separate “Replace Patch” sysex messages. Each message should overwrite consecutive patch numbers, starting from 0 and counting up to 63.

## Setup View

You can enter setup view by holding down Shift and Pressing save. For a full description of setup view please see the full Circuit Tracks user guide on the Novation Downloads page.

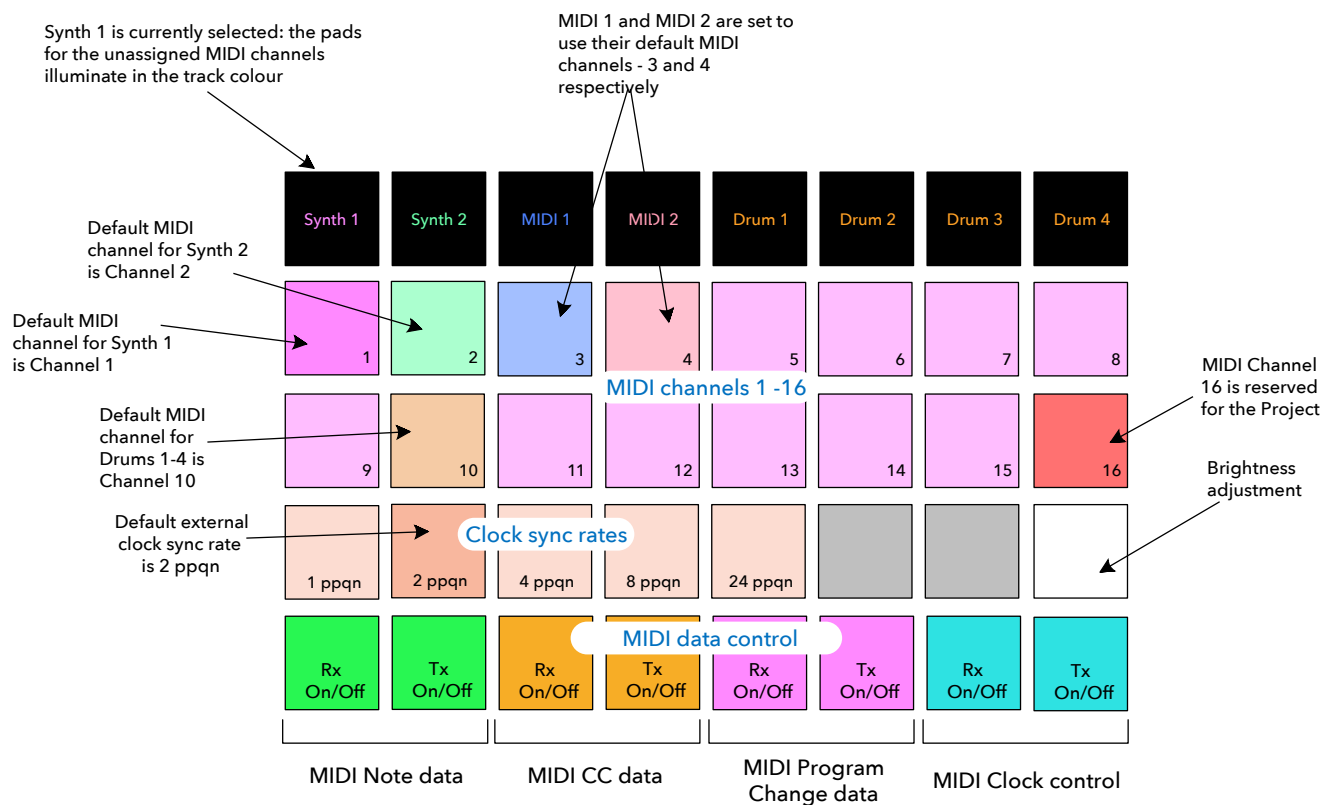

# Synth Patch Format

| Address | Default | Min | Max | Parameter(s)          |
|---------|---------|-----|-----|-----------------------|
| 0       | 73      | -   | -   | Patch_Name            |
| 1       | 110     | -   | -   | Patch_Name            |
| 2       | 105     | -   | -   | Patch_Name            |
| 3       | 116     | -   | -   | Patch_Name            |
| 4       | 105     | -   | -   | Patch_Name            |
| 5       | 97      | -   | -   | Patch_Name            |
| 6       | 108     | -   | -   | Patch_Name            |
| 7       | 32      | -   | -   | Patch_Name            |
| 8       | 80      | -   | -   | Patch_Name            |
| 9       | 97      | -   | -   | Patch_Name            |
| 10      | 116     | -   | -   | Patch_Name            |
| 11      | 99      | -   | -   | Patch_Name            |
| 12      | 104     | -   | -   | Patch_Name            |
| 13      | 32      | -   | -   | Patch_Name            |
| 14      | 32      | -   | -   | Patch_Name            |
| 15      | 32      | -   | -   | Patch_Name            |
| 16      | 0       | 0   | 14  | Patch_Category        |
| 17      | 0       | 0   | 9   | Patch_Genre           |
| 18      | 0       | -   | -   | Patch_Reserved1       |
| 19      | 0       | -   | -   | Patch_Reserved2       |
| 20      | 0       | -   | -   | Patch_Reserved3       |
| 21      | 0       | -   | -   | Patch_Reserved4       |
| 22      | 0       | -   | -   | Patch_Reserved5       |
| 23      | 0       | -   | -   | Patch_Reserved6       |
| 24      | 0       | -   | -   | Patch_Reserved7       |
| 25      | 0       | -   | -   | Patch_Reserved8       |
| 26      | 0       | -   | -   | Patch_Reserved9       |
| 27      | 0       | -   | -   | Patch_Reserved10      |
| 28      | 0       | -   | -   | Patch_Reserved11      |
| 29      | 0       | -   | -   | Patch_Reserved12      |
| 30      | 0       | -   | -   | Patch_Reserved13      |
| 31      | 0       | -   | -   | Patch_Reserved14      |
| 32      | 2       | 0   | 2   | Voice_PolyphonyMode   |
| 33      | 0       | 0   | 127 | Voice_PortamentoRate  |
| 34      | 64      | 52  | 76  | Voice_PreGlide        |
| 35      | 64      | 58  | 69  | Voice_KeyboardOctave  |
| 36      | 2       | 0   | 29  | Osc1_Wave             |
| 37      | 127     | 0   | 127 | Osc1_WaveInterpolate  |
| 38      | 64      | 0   | 127 | Osc1_PulseWidthIndex  |
| 39      | 0       | 0   | 127 | Osc1_VirtualSyncDepth |
| 40      | 0       | 0   | 127 | Osc1_Density          |
| 41      | 0       | 0   | 127 | Osc1_DensityDetune    |
| 42      | 64      | 0   | 127 | Osc1_Semitones        |
| 43      | 64      | 0   | 127 | Osc1_Cents            |
| 44      | 76      | 52  | 76  | Osc1_PitchBend        |
| 45      | 2       | 0   | 29  | Osc2_Wave             |
| 46      | 127     | 0   | 127 | Osc2_WaveInterpolate  |



|        |    |     |                                                                                                                          |
|--------|----|-----|--------------------------------------------------------------------------------------------------------------------------|
| 47 64  | 0  | 127 | Osc2_PulseWidthIndex                                                                                                     |
| 48 0   | 0  | 127 | Osc2_VirtualSyncDepth                                                                                                    |
| 49 0   | 0  | 127 | Osc2_Density                                                                                                             |
| 50 0   | 0  | 127 | Osc2_DensityDetune                                                                                                       |
| 51 64  | 0  | 127 | Osc2_Semitones                                                                                                           |
| 52 64  | 0  | 127 | Osc2_Cents                                                                                                               |
| 53 76  | 52 | 76  | Osc2_PitchBend                                                                                                           |
| 54 127 | 0  | 127 | Mixer_Osc1Level                                                                                                          |
| 55 0   | 0  | 127 | Mixer_Osc2Level                                                                                                          |
| 56 0   | 0  | 127 | Mixer_RingModLevel12                                                                                                     |
| 57 0   | 0  | 127 | Mixer_NoiseLevel                                                                                                         |
| 58 64  | 52 | 82  | Mixer_PreFXLevel                                                                                                         |
| 59 64  | 52 | 82  | Mixer_PostFXLevel                                                                                                        |
| 60 0   | 0  | 2   | Filter_Routing                                                                                                           |
| 61 0   | 0  | 127 | Filter_Drive                                                                                                             |
| 62 0   | 0  | 6   | Filter_DriveType                                                                                                         |
| 63 1   | 0  | 5   | Filter_Type                                                                                                              |
| 64 127 | 0  | 127 | Filter_Frequency                                                                                                         |
| 65 127 | 0  | 127 | Filter_Track                                                                                                             |
| 66 0   | 0  | 127 | Filter_Resonance                                                                                                         |
| 67 64  | 0  | 127 | Filter_QNormalise                                                                                                        |
| 68 64  | 0  | 127 | Filter_Env2ToFreq                                                                                                        |
| 69 64  | 0  | 127 | Envelope1_Velocity                                                                                                       |
| 70 2   | 0  | 127 | Envelope1_Attack                                                                                                         |
| 71 90  | 0  | 127 | Envelope1_Decay                                                                                                          |
| 72 127 | 0  | 127 | Envelope1_Sustain                                                                                                        |
| 73 40  | 0  | 127 | Envelope1_Release                                                                                                        |
| 74 64  | 0  | 127 | Envelope2_Velocity                                                                                                       |
| 75 2   | 0  | 127 | Envelope2_Attack                                                                                                         |
| 76 75  | 0  | 127 | Envelope2_Decay                                                                                                          |
| 77 35  | 0  | 127 | Envelope2_Sustain                                                                                                        |
| 78 45  | 0  | 127 | Envelope2_Release                                                                                                        |
| 79 0   | 0  | 127 | Envelope3_Delay                                                                                                          |
| 80 10  | 0  | 127 | Envelope3_Attack                                                                                                         |
| 81 70  | 0  | 127 | Envelope3_Decay                                                                                                          |
| 82 64  | 0  | 127 | Envelope3_Sustain                                                                                                        |
| 83 40  | 0  | 127 | Envelope3_Release                                                                                                        |
| 84 0   | 0  | 37  | LFO1_Waveform                                                                                                            |
| 85 0   | 0  | 119 | LFO1_PhaseOffset                                                                                                         |
| 86 0   | 0  | 127 | LFO1_SlewRate                                                                                                            |
| 87 0   | 0  | 127 | LFO1_Delay                                                                                                               |
| 88 0   | 0  | 35  | LFO1_DelaySync                                                                                                           |
| 89 68  | 0  | 127 | LFO1_Rate                                                                                                                |
| 90 0   | 0  | 35  | LFO1_RateSync                                                                                                            |
| 91 0   | -  | -   | LFO1_OneShot (bit 0), LFO1_KeySync (bit 1), LFO1_CommonSync (bit 2), LFO1_DelayTrigger (bit 3), LFO1_FadeMode (bits 4-5) |
| 92 0   | 0  | 37  | LFO2_Waveform                                                                                                            |
| 93 0   | 0  | 119 | LFO2_PhaseOffset                                                                                                         |
| 94 0   | 0  | 127 | LFO2_SlewRate                                                                                                            |
| 95 0   | 0  | 127 | LFO2_Delay                                                                                                               |

|         |   |     |                                                                                                                          |
|---------|---|-----|--------------------------------------------------------------------------------------------------------------------------|
| 96 0    | 0 | 35  | LFO2_DelaySync                                                                                                           |
| 97 68   | 0 | 127 | LFO2_Rate                                                                                                                |
| 98 0    | 0 | 35  | LFO2_RateSync                                                                                                            |
| 99 0    | - | -   | LFO2_OneShot (bit 0), LFO2_KeySync (bit 1), LFO2_CommonSync (bit 2), LFO2_DelayTrigger (bit 3), LFO2_FadeMode (bits 4-5) |
| 100 0   | 0 | 127 | Distortion_Level                                                                                                         |
| 101 0   | 0 | 127 | FX_Reserved1                                                                                                             |
| 102 0   | 0 | 127 | Chorus_Level                                                                                                             |
| 103 0   | - | -   | FX_Reserved2                                                                                                             |
| 104 0   | - | -   | FX_Reserved3                                                                                                             |
| 105 64  | 0 | 127 | Equaliser_BassFrequency                                                                                                  |
| 106 64  | 0 | 127 | Equaliser_BassLevel                                                                                                      |
| 107 64  | 0 | 127 | Equaliser_MidFrequency                                                                                                   |
| 108 64  | 0 | 127 | Equaliser_MidLevel                                                                                                       |
| 109 125 | 0 | 127 | Equaliser_TrebleFrequency                                                                                                |
| 110 64  | 0 | 127 | Equaliser_TrebleLevel                                                                                                    |
| 111 0   | - | -   | FX_Reserved4                                                                                                             |
| 112 0   | - | -   | FX_Reserved5                                                                                                             |
| 113 0   | - | -   | FX_Reserved6                                                                                                             |
| 114 0   | - | -   | FX_Reserved7                                                                                                             |
| 115 0   | - | -   | FX_Reserved8                                                                                                             |
| 116 0   | 0 | 6   | Distortion_Type                                                                                                          |
| 117 100 | 0 | 127 | Distortion_Compensation                                                                                                  |
| 118 1   | 0 | 1   | Chorus_Type                                                                                                              |
| 119 20  | 0 | 127 | Chorus_Rate                                                                                                              |
| 120 0   | 0 | 35  | Chorus_RateSync                                                                                                          |
| 121 74  | 0 | 127 | Chorus_Feedback                                                                                                          |
| 122 64  | 0 | 127 | Chorus_ModDepth                                                                                                          |
| 123 64  | 0 | 127 | Chorus_Delay                                                                                                             |
| 124 0   | 0 | 12  | ModMatrix1_Source1                                                                                                       |
| 125 0   | 0 | 12  | ModMatrix1_Source2                                                                                                       |
| 126 64  | 0 | 127 | ModMatrix1_Depth                                                                                                         |
| 127 0   | 0 | 17  | ModMatrix1_Destination                                                                                                   |
| 128 0   | 0 | 12  | ModMatrix2_Source1                                                                                                       |
| 129 0   | 0 | 12  | ModMatrix2_Source2                                                                                                       |
| 130 64  | 0 | 127 | ModMatrix2_Depth                                                                                                         |
| 131 0   | 0 | 17  | ModMatrix2_Destination                                                                                                   |
| 132 0   | 0 | 12  | ModMatrix3_Source1                                                                                                       |
| 133 0   | 0 | 12  | ModMatrix3_Source2                                                                                                       |
| 134 64  | 0 | 127 | ModMatrix3_Depth                                                                                                         |
| 135 0   | 0 | 17  | ModMatrix3_Destination                                                                                                   |
| 136 0   | 0 | 12  | ModMatrix4_Source1                                                                                                       |
| 137 0   | 0 | 12  | ModMatrix4_Source2                                                                                                       |
| 138 64  | 0 | 127 | ModMatrix4_Depth                                                                                                         |
| 139 0   | 0 | 17  | ModMatrix4_Destination                                                                                                   |
| 140 0   | 0 | 12  | ModMatrix5_Source1                                                                                                       |
| 141 0   | 0 | 12  | ModMatrix5_Source2                                                                                                       |
| 142 64  | 0 | 127 | ModMatrix5_Depth                                                                                                         |
| 143 0   | 0 | 17  | ModMatrix5_Destination                                                                                                   |
| 144 0   | 0 | 12  | ModMatrix6_Source1                                                                                                       |

|        |   |     |                         |
|--------|---|-----|-------------------------|
| 145 0  | 0 | 12  | ModMatrix6_Source2      |
| 146 64 | 0 | 127 | ModMatrix6_Depth        |
| 147 0  | 0 | 17  | ModMatrix6_Destination  |
| 148 0  | 0 | 12  | ModMatrix7_Source1      |
| 149 0  | 0 | 12  | ModMatrix7_Source2      |
| 150 64 | 0 | 127 | ModMatrix7_Depth        |
| 151 0  | 0 | 17  | ModMatrix7_Destination  |
| 152 0  | 0 | 12  | ModMatrix8_Source1      |
| 153 0  | 0 | 12  | ModMatrix8_Source2      |
| 154 64 | 0 | 127 | ModMatrix8_Depth        |
| 155 0  | 0 | 17  | ModMatrix8_Destination  |
| 156 0  | 0 | 12  | ModMatrix9_Source1      |
| 157 0  | 0 | 12  | ModMatrix9_Source2      |
| 158 64 | 0 | 127 | ModMatrix9_Depth        |
| 159 0  | 0 | 17  | ModMatrix9_Destination  |
| 160 0  | 0 | 12  | ModMatrix10_Source1     |
| 161 0  | 0 | 12  | ModMatrix10_Source2     |
| 162 64 | 0 | 127 | ModMatrix10_Depth       |
| 163 0  | 0 | 17  | ModMatrix10_Destination |
| 164 0  | 0 | 12  | ModMatrix11_Source1     |
| 165 0  | 0 | 12  | ModMatrix11_Source2     |
| 166 64 | 0 | 127 | ModMatrix11_Depth       |
| 167 0  | 0 | 17  | ModMatrix11_Destination |
| 168 0  | 0 | 12  | ModMatrix12_Source1     |
| 169 0  | 0 | 12  | ModMatrix12_Source2     |
| 170 64 | 0 | 127 | ModMatrix12_Depth       |
| 171 0  | 0 | 17  | ModMatrix12_Destination |
| 172 0  | 0 | 12  | ModMatrix13_Source1     |
| 173 0  | 0 | 12  | ModMatrix13_Source2     |
| 174 64 | 0 | 127 | ModMatrix13_Depth       |
| 175 0  | 0 | 17  | ModMatrix13_Destination |
| 176 0  | 0 | 12  | ModMatrix14_Source1     |
| 177 0  | 0 | 12  | ModMatrix14_Source2     |
| 178 64 | 0 | 127 | ModMatrix14_Depth       |
| 179 0  | 0 | 17  | ModMatrix14_Destination |
| 180 0  | 0 | 12  | ModMatrix15_Source1     |
| 181 0  | 0 | 12  | ModMatrix15_Source2     |
| 182 64 | 0 | 127 | ModMatrix15_Depth       |
| 183 0  | 0 | 17  | ModMatrix15_Destination |
| 184 0  | 0 | 12  | ModMatrix16_Source1     |
| 185 0  | 0 | 12  | ModMatrix16_Source2     |
| 186 64 | 0 | 127 | ModMatrix16_Depth       |
| 187 0  | 0 | 17  | ModMatrix16_Destination |
| 188 0  | 0 | 12  | ModMatrix17_Source1     |
| 189 0  | 0 | 12  | ModMatrix17_Source2     |
| 190 64 | 0 | 127 | ModMatrix17_Depth       |
| 191 0  | 0 | 17  | ModMatrix17_Destination |
| 192 0  | 0 | 12  | ModMatrix18_Source1     |
| 193 0  | 0 | 12  | ModMatrix18_Source2     |
| 194 64 | 0 | 127 | ModMatrix18_Depth       |

|         |   |     |                         |
|---------|---|-----|-------------------------|
| 195 0   | 0 | 17  | ModMatrix18_Destination |
| 196 0   | 0 | 12  | ModMatrix19_Source1     |
| 197 0   | 0 | 12  | ModMatrix19_Source2     |
| 198 64  | 0 | 127 | ModMatrix19_Depth       |
| 199 0   | 0 | 17  | ModMatrix19_Destination |
| 200 0   | 0 | 12  | ModMatrix20_Source1     |
| 201 0   | 0 | 12  | ModMatrix20_Source2     |
| 202 64  | 0 | 127 | ModMatrix20_Depth       |
| 203 0   | 0 | 17  | ModMatrix20_Destination |
| 204 0   | 0 | 127 | MacroKnob1_Position     |
| 205 0   | 0 | 70  | MacroKnob1_DestinationA |
| 206 0   | 0 | 127 | MacroKnob1_StartPosA    |
| 207 127 | 0 | 127 | MacroKnob1_EndPosA      |
| 208 64  | 0 | 127 | MacroKnob1_DepthA       |
| 209 0   | 0 | 70  | MacroKnob1_DestinationB |
| 210 0   | 0 | 127 | MacroKnob1_StartPosB    |
| 211 127 | 0 | 127 | MacroKnob1_EndPosB      |
| 212 64  | 0 | 127 | MacroKnob1_DepthB       |
| 213 0   | 0 | 70  | MacroKnob1_DestinationC |
| 214 0   | 0 | 127 | MacroKnob1_StartPosC    |
| 215 127 | 0 | 127 | MacroKnob1_EndPosC      |
| 216 64  | 0 | 127 | MacroKnob1_DepthC       |
| 217 0   | 0 | 70  | MacroKnob1_DestinationD |
| 218 0   | 0 | 127 | MacroKnob1_StartPosD    |
| 219 127 | 0 | 127 | MacroKnob1_EndPosD      |
| 220 64  | 0 | 127 | MacroKnob1_DepthD       |
| 221 0   | 0 | 127 | MacroKnob2_Position     |
| 222 0   | 0 | 70  | MacroKnob2_DestinationA |
| 223 0   | 0 | 127 | MacroKnob2_StartPosA    |
| 224 127 | 0 | 127 | MacroKnob2_EndPosA      |
| 225 64  | 0 | 127 | MacroKnob2_DepthA       |
| 226 0   | 0 | 70  | MacroKnob2_DestinationB |
| 227 0   | 0 | 127 | MacroKnob2_StartPosB    |
| 228 127 | 0 | 127 | MacroKnob2_EndPosB      |
| 229 64  | 0 | 127 | MacroKnob2_DepthB       |
| 230 0   | 0 | 70  | MacroKnob2_DestinationC |
| 231 0   | 0 | 127 | MacroKnob2_StartPosC    |
| 232 127 | 0 | 127 | MacroKnob2_EndPosC      |
| 233 64  | 0 | 127 | MacroKnob2_DepthC       |
| 234 0   | 0 | 70  | MacroKnob2_DestinationD |
| 235 0   | 0 | 127 | MacroKnob2_StartPosD    |
| 236 127 | 0 | 127 | MacroKnob2_EndPosD      |
| 237 64  | 0 | 127 | MacroKnob2_DepthD       |
| 238 0   | 0 | 127 | MacroKnob3_Position     |
| 239 0   | 0 | 70  | MacroKnob3_DestinationA |
| 240 0   | 0 | 127 | MacroKnob3_StartPosA    |
| 241 127 | 0 | 127 | MacroKnob3_EndPosA      |
| 242 64  | 0 | 127 | MacroKnob3_DepthA       |
| 243 0   | 0 | 70  | MacroKnob3_DestinationB |
| 244 0   | 0 | 127 | MacroKnob3_StartPosB    |

|         |   |     |                         |
|---------|---|-----|-------------------------|
| 245 127 | 0 | 127 | MacroKnob3_EndPosB      |
| 246 64  | 0 | 127 | MacroKnob3_DepthB       |
| 247 0   | 0 | 70  | MacroKnob3_DestinationC |
| 248 0   | 0 | 127 | MacroKnob3_StartPosC    |
| 249 127 | 0 | 127 | MacroKnob3_EndPosC      |
| 250 64  | 0 | 127 | MacroKnob3_DepthC       |
| 251 0   | 0 | 70  | MacroKnob3_DestinationD |
| 252 0   | 0 | 127 | MacroKnob3_StartPosD    |
| 253 127 | 0 | 127 | MacroKnob3_EndPosD      |
| 254 64  | 0 | 127 | MacroKnob3_DepthD       |
| 255 0   | 0 | 127 | MacroKnob4_Position     |
| 256 0   | 0 | 70  | MacroKnob4_DestinationA |
| 257 0   | 0 | 127 | MacroKnob4_StartPosA    |
| 258 127 | 0 | 127 | MacroKnob4_EndPosA      |
| 259 64  | 0 | 127 | MacroKnob4_DepthA       |
| 2v 0    | 0 | 70  | MacroKnob4_DestinationB |
| 261 0   | 0 | 127 | MacroKnob4_StartPosB    |
| 262 127 | 0 | 127 | MacroKnob4_EndPosB      |
| 263 64  | 0 | 127 | MacroKnob4_DepthB       |
| 264 0   | 0 | 70  | MacroKnob4_DestinationC |
| 265 0   | 0 | 127 | MacroKnob4_StartPosC    |
| 266 127 | 0 | 127 | MacroKnob4_EndPosC      |
| 267 64  | 0 | 127 | MacroKnob4_DepthC       |
| 268 0   | 0 | 70  | MacroKnob4_DestinationD |
| 269 0   | 0 | 127 | MacroKnob4_StartPosD    |
| 270 127 | 0 | 127 | MacroKnob4_EndPosD      |
| 271 64  | 0 | 127 | MacroKnob4_DepthD       |
| 272 0   | 0 | 127 | MacroKnob5_Position     |
| 273 0   | 0 | 70  | MacroKnob5_DestinationA |
| 274 0   | 0 | 127 | MacroKnob5_StartPosA    |
| 275 127 | 0 | 127 | MacroKnob5_EndPosA      |
| 276 64  | 0 | 127 | MacroKnob5_DepthA       |
| 277 0   | 0 | 70  | MacroKnob5_DestinationB |
| 278 0   | 0 | 127 | MacroKnob5_StartPosB    |
| 279 127 | 0 | 127 | MacroKnob5_EndPosB      |
| 280 64  | 0 | 127 | MacroKnob5_DepthB       |
| 281 0   | 0 | 70  | MacroKnob5_DestinationC |
| 282 0   | 0 | 127 | MacroKnob5_StartPosC    |
| 283 127 | 0 | 127 | MacroKnob5_EndPosC      |
| 284 64  | 0 | 127 | MacroKnob5_DepthC       |
| 285 0   | 0 | 70  | MacroKnob5_DestinationD |
| 286 0   | 0 | 127 | MacroKnob5_StartPosD    |
| 287 127 | 0 | 127 | MacroKnob5_EndPosD      |
| 288 64  | 0 | 127 | MacroKnob5_DepthD       |
| 289 0   | 0 | 127 | MacroKnob6_Position     |
| 290 0   | 0 | 70  | MacroKnob6_DestinationA |
| 291 0   | 0 | 127 | MacroKnob6_StartPosA    |
| 292 127 | 0 | 127 | MacroKnob6_EndPosA      |
| 293 64  | 0 | 127 | MacroKnob6_DepthA       |
| 294 0   | 0 | 70  | MacroKnob6_DestinationB |
| 295 0   | 0 | 127 | MacroKnob6_StartPosB    |

|         |   |     |                         |
|---------|---|-----|-------------------------|
| 296 127 | 0 | 127 | MacroKnob6_EndPosB      |
| 297 64  | 0 | 127 | MacroKnob6_DepthB       |
| 298 0   | 0 | 70  | MacroKnob6_DestinationC |
| 299 0   | 0 | 127 | MacroKnob6_StartPosC    |
| 300 127 | 0 | 127 | MacroKnob6_EndPosC      |
| 301 64  | 0 | 127 | MacroKnob6_DepthC       |
| 302 0   | 0 | 70  | MacroKnob6_DestinationD |
| 303 0   | 0 | 127 | MacroKnob6_StartPosD    |
| 304 127 | 0 | 127 | MacroKnob6_EndPosD      |
| 305 64  | 0 | 127 | MacroKnob6_DepthD       |
| 306 0   | 0 | 127 | MacroKnob7_Position     |
| 307 0   | 0 | 70  | MacroKnob7_DestinationA |
| 308 0   | 0 | 127 | MacroKnob7_StartPosA    |
| 309 127 | 0 | 127 | MacroKnob7_EndPosA      |
| 310 64  | 0 | 127 | MacroKnob7_DepthA       |
| 311 0   | 0 | 70  | MacroKnob7_DestinationB |
| 312 0   | 0 | 127 | MacroKnob7_StartPosB    |
| 313 127 | 0 | 127 | MacroKnob7_EndPosB      |
| 314 64  | 0 | 127 | MacroKnob7_DepthB       |
| 315 0   | 0 | 70  | MacroKnob7_DestinationC |
| 316 0   | 0 | 127 | MacroKnob7_StartPosC    |
| 317 127 | 0 | 127 | MacroKnob7_EndPosC      |
| 318 64  | 0 | 127 | MacroKnob7_DepthC       |
| 319 0   | 0 | 70  | MacroKnob7_DestinationD |
| 320 0   | 0 | 127 | MacroKnob7_StartPosD    |
| 321 127 | 0 | 127 | MacroKnob7_EndPosD      |
| 322 64  | 0 | 127 | MacroKnob7_DepthD       |
| 323 0   | 0 | 127 | MacroKnob8_Position     |
| 324 0   | 0 | 70  | MacroKnob8_DestinationA |
| 325 0   | 0 | 127 | MacroKnob8_StartPosA    |
| 326 127 | 0 | 127 | MacroKnob8_EndPosA      |
| 327 64  | 0 | 127 | MacroKnob8_DepthA       |
| 328 0   | 0 | 70  | MacroKnob8_DestinationB |
| 329 0   | 0 | 127 | MacroKnob8_StartPosB    |
| 330 127 | 0 | 127 | MacroKnob8_EndPosB      |
| 331 64  | 0 | 127 | MacroKnob8_DepthB       |
| 332 0   | 0 | 70  | MacroKnob8_DestinationC |
| 333 0   | 0 | 127 | MacroKnob8_StartPosC    |
| 334 127 | 0 | 127 | MacroKnob8_EndPosC      |
| 335 64  | 0 | 127 | MacroKnob8_DepthC       |
| 336 0   | 0 | 70  | MacroKnob8_DestinationD |
| 337 0   | 0 | 127 | MacroKnob8_StartPosD    |
| 338 127 | 0 | 127 | MacroKnob8_EndPosD      |
| 339 64  | 0 | 127 | MacroKnob8_DepthD       |